



Remote 5100
0.5µm @ 1.0 cfm (28.3 lpm) 2 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data
- Cost Effective Price per Point • Compact Size • Uses External Vacuum Source • Stainless Steel Enclosure • Versatile Mounting Options • Status Indicators • Pulse Output • 1.7"(l) x 4.2"(w) x 2.5"(h) [4.3 x 10.7 x 6.3 cm] • 12.5 oz (0.35 kg)



Remote 5010
0.5µm @ 0.1 cfm (2.83 lpm) 2 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data
- Cost Effective Price per Point • Compact Size • Uses External Vacuum Source • Stainless Steel Enclosure • Versatile Mounting Options • Status Indicators • Pulse Output • 1.7"(l) x 4.2"(w) x 2.5"(h) [4.3 x 10.7 x 6.3 cm] • 12.5 oz (0.35 kg)



Remote 3010
0.3µm @ 0.1 cfm (2.83 lpm) 2 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data
- Cost Effective Price per Point • Compact Size • Uses External Vacuum Source • Stainless Steel Enclosure • Versatile Mounting Options • Status Indicators • Pulse Output • 1.7"(l) x 4.2"(w) x 2.5"(h) [4.3 x 10.7 x 6.3 cm] • 12.5 oz (0.35 kg)



Remote 2010
0.2µm @ 0.1 cfm (2.83 lpm) 2 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data
- Cost Effective Price per Point • Compact Size • Uses External Vacuum Source • Stainless Steel Enclosure • Versatile Mounting Options • Status Indicators • Pulse Output • 1.7"(l) x 4.2"(w) x 3"(h) [4.3 x 10.7 x 7.6 cm] • 14 oz (0.40 kg)



Remote 5102
0.5µm @ 1.0 cfm (28.3 lpm) 2 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data
- Cost Effective Price per Point • Compact Size • Uses External Vacuum Source • Stainless Steel Enclosure • Versatile Mounting Options • Status Indicators • 4-20mA Output • 1.7"(l) x 4.2"(w) x 2.5"(h) [4.3 x 10.7 x 6.3 cm] • 12.5 oz (0.35 kg)



Remote 5012
0.5µm @ 0.1 cfm (2.83 lpm) 2 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data
- Cost Effective Price per Point • Compact Size • Uses External Vacuum Source • Stainless Steel Enclosure • Versatile Mounting Options • Status Indicators • 4-20mA Output • 1.7"(l) x 4.2"(w) x 2.5"(h) [4.3 x 10.7 x 6.3 cm] • 12.5 oz (0.35 kg)



Remote 3012
0.3µm @ 0.1 cfm (2.83 lpm) 2 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data
- Cost Effective Price per Point • Compact Size • Uses External Vacuum Source • Stainless Steel Enclosure • Versatile Mounting Options • Status Indicators • 4-20mA Output • 1.7"(l) x 4.2"(w) x 2.5"(h) [4.3 x 10.7 x 6.3 cm] • 12.5 oz (0.35 kg)



Remote 2012
0.2µm @ 0.1 cfm (2.83 lpm) 2 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data
- Cost Effective Price per Point • Compact Size • Uses External Vacuum Source • Stainless Steel Enclosure • Versatile Mounting Options • Status Indicators • 4-20mA Output • 1.7"(l) x 4.2"(w) x 3"(h) [4.3 x 10.7 x 7.6 cm] • 14 oz (0.40 kg)



Remote 5104
0.5µm @ 1.0 cfm (28.3 lpm) Up to 4 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data
- Cost Effective Price per Point • Compact Size • Uses External Vacuum Source • Stainless Steel Enclosure • Versatile Mounting Options • External Alarm Output • Temperature/Relative Humidity Probe (optional) • Status Indicators • RS-485 Modbus • 1.7"(l) x 4.2"(w) x 3"(h) [4.3 x 10.7 x 7.6 cm] • 15.6 oz (0.44kg)



Remote 5014
0.5µm @ 0.1 cfm (2.83 lpm) Up to 4 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data
- Cost Effective Price per Point • Compact Size • Uses External Vacuum Source • Stainless Steel Enclosure • Versatile Mounting Options • External Alarm Output • Temperature/Relative Humidity Probe (optional) • Status Indicators • RS-485 Modbus • 1.7"(l) x 4.2"(w) x 3"(h) [4.3 x 10.7 x 7.6 cm] • 15.6 oz (0.44 kg)



Remote 3014
0.3µm @ 0.1 cfm (2.83 lpm) Up to 4 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data
- Cost Effective Price per Point • Compact Size • Uses External Vacuum Source •
- Stainless Steel Enclosure • Versatile Mounting Options • External Alarm Output •
- Temperature/Relative Humidity Probe (optional) • Status Indicators • RS-485 Modbus
- 1.7"(l) x 4.2"(w) x 3"(h) [4.3 x 10.7 x 7.6 cm] • 15.6 oz (0.44kg)



Remote 2014
0.2µm @ 0.1 cfm (2.83 lpm) Up to 4 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data
- Cost Effective Price per Point • Compact Size • Uses External Vacuum Source •
- Stainless Steel Enclosure • Versatile Mounting Options • External Alarm Output •
- Temperature/Relative Humidity Probe (optional) • Status Indicators • RS-485 Modbus
- 2.0"(l) x 4.2"(w) x 3"(h) [5.0 x 10.7 x 7.6 cm] • 15.6 oz (0.44 kg)




Remote Liquid Particle Counters (RS-485 / MODBUS)
0.1 to 0.5µm @ 100 ml/min. Up to 2 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data •
- Cost Effective Price per Point • Compact Size • Stainless Steel Enclosure • Versatile
- Mounting Options • LED Status Indicators • RS-485 Modbus • 5.7"(l) x 5.2"(w) x 3"(h)
- [14.47 x 13.2 x 7.6 cm] • 3.5 lb (1.58 kg)



Remote Liquid Particle Counters (4-20mA)
0.1 to 0.5µm @ 100 ml/min. Up to 2 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data •
- Cost Effective Price per Point • Compact Size • Stainless Steel Enclosure • Versatile
- Mounting Options • LED Status Indicators • 4-20mA • 5.7"(l) x 5.2"(w) x 3"(h) [14.47 x
- 13.2 x 7.6 cm] • 3.5 lb (1.58 kg)

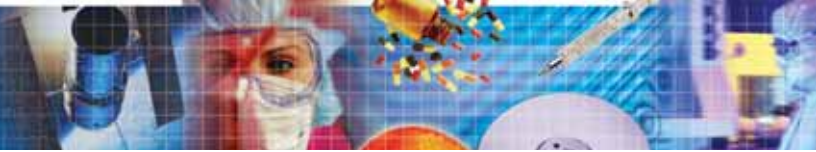

Remote 5014P with Built In Pump
0.5µm @ 0.1 cfm (2.83 lpm) Up to 6 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data • Cost Effective Price per Point • Compact Size • Uses Internal Vacuum Source • Stainless Steel Enclosure • Versatile Mounting Options • Status Indicators • RS-485 Modbus • 9"(l) x 3.5"(w) x 6"(h) [22.86 x 8.89 x 15.24 cm] • 3.19 lbs (1.45 kg)



Remote 3014P with Built In Pump
0.3µm @ 0.1 cfm (2.83 lpm) Up to 6 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data • Cost Effective Price per Point • Compact Size • Uses Internal Vacuum Source • Stainless Steel Enclosure • Versatile Mounting Options • External Alarm Output • Status Indicators • RS-485 Modbus • 9"(l) x 3.5"(w) x 6"(h) [22.86 x 8.89 x 15.24 cm] • 3.19 lbs (1.45 kg)



Remote 2014P with Built In Pump
0.2µm @ 0.1 cfm (2.83 lpm) Up to 6 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data • Cost Effective Price per Point • Compact Size • Uses Internal Vacuum Source • Stainless Steel Enclosure • Versatile Mounting Options • External Alarm Output • Status Indicators • RS-485 Modbus • 9"(l) x 3.5"(w) x 6"(h) [22.86 x 8.89 x 15.24 cm] • 3.19 lbs (1.45 kg)



Remote 1100
0.1µm @ 1.0 cfm (28.3 lpm) Up to 8 channel particle counter

- Interfaces to Facility Monitoring Systems • Provides Continuous Real-Time Data • Cost Effective Price per Point • Long Life, Hard Sealed HeNe 633nm Laser • Uses External Vacuum Source • Stainless Steel Enclosure • Status Indicators • RS-485 Modbus, Pulse Output • 17.7" (l) x 5.0" (w) x 5.0" (h) [44.96 x 12.7 x 12.7 cm] • 11.5 lb (5.23 kg)

Lighthouse is an ISO 9001:2000 Registered Company

Manufactured by:



www.golighthouse.com
info@golighthouse.com

Tel: 866 507 9200
510 438 0500 (Outside of USA)

Distributed by:

Easy Solutions

23/7 Thiru-Vi-Ka 3rd St., Royapettah High Rd., Chennai - 600 004
Tel: 044-24671431, 24984010 Fax: 044-42107495
Email: sales@cleanroommart.com
Website: www.cleanroommart.com